

USER MANUAL

SMART SWITCH

Touch Works


- > Identify three types of wires (Line, Neutral & several Loads)
- > Switch off the main power/ Circuit Breaker/ Fuse



*For replacement, remove existing switch board from wall


02

- > Twist to remove touch panel from base with small screwdriver

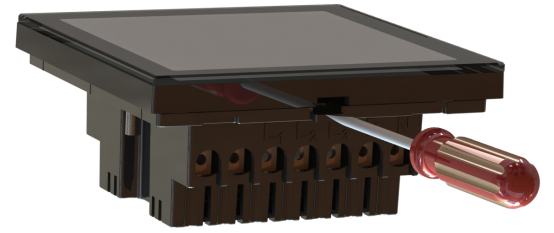


03

- > Wiring line, neutral and load according to base marking

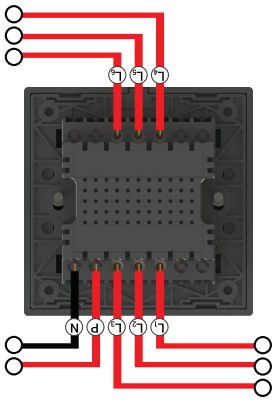

04

- > Mount the base of smart switch board into the wall with 86 type screw cassette

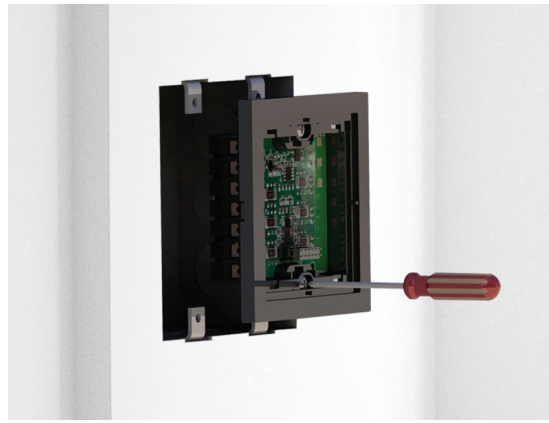


05

- > Match the lower corner part of the base with touch panel. Place the touch panel over the base & slightly push it




06

- > Enable internet connection, download Smart Home app and Sign Up
- > A verification code will be sent in your provided email address, enter the code and submit

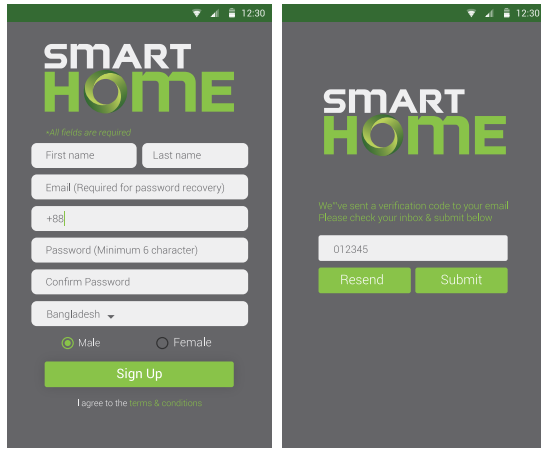


07

- > Turn on Bluetooth and Sign in with your provided email address and password

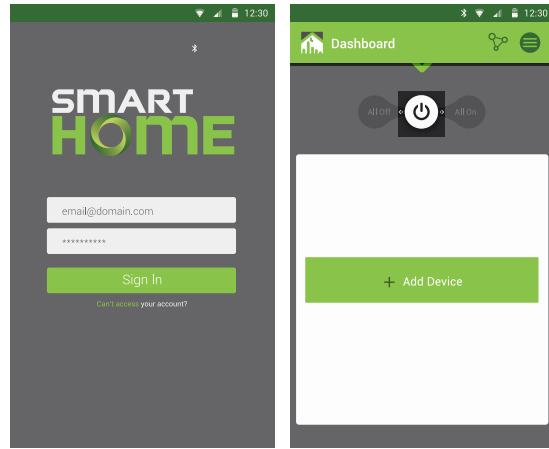

08


- > Before adding device, tap and hold switch 2 & 5 at a time for 2 seconds from installed smart switch to start broadcasting mode

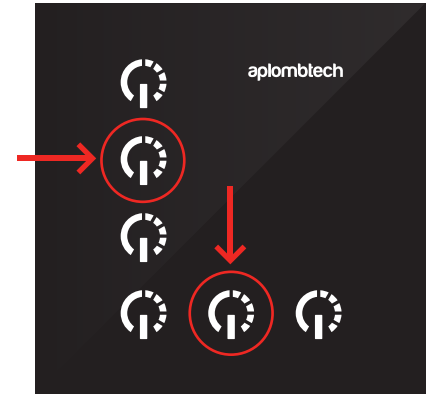

* Switch indicator would be blinked sequentially to confirm deletion/deassociation


09

- > Once broadcasting mode is on, tap 'Add a device' to add switch board from searched list.

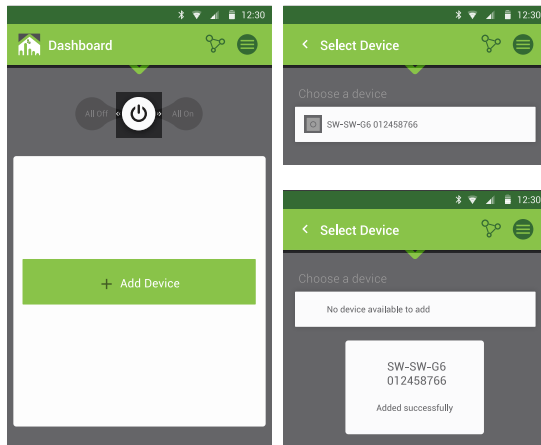


10

- > Go to 'Menu', select Devices and tap 'Edit' icon to rename added device

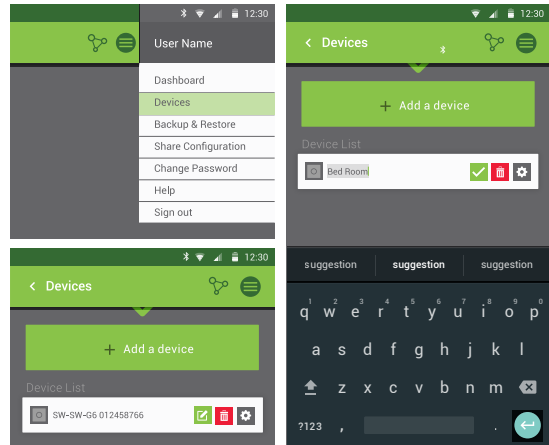


11

- > Tap 'Setting' icon, select any channel to configure/assign load device

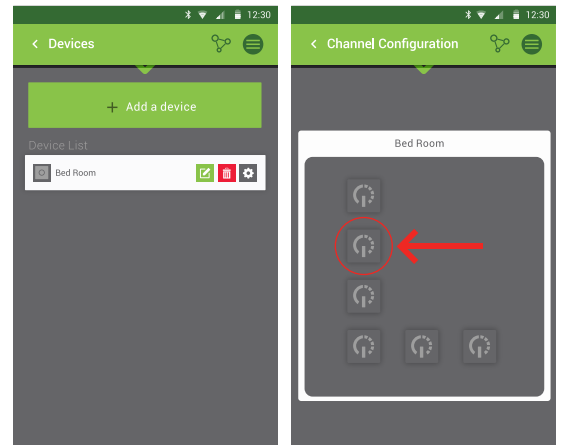

12


> Rename load, select type of load and tap 'Done' button to configure load

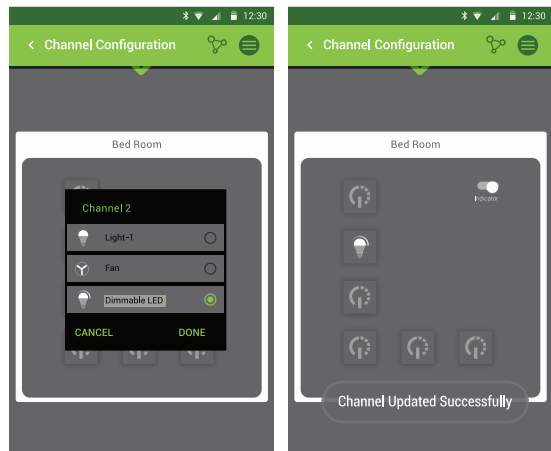

- Type of loads are Energy Light, Fan and Dimmable Light at V 1.0
- Other channel can be configured with different load in the same way


13

> To control load, go to dashboard from Menu, select the configured load to turn On/Off

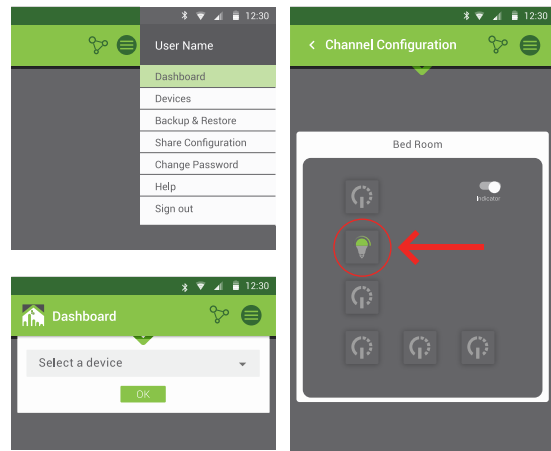


14

> Swipe "Global On/Off" button to control all the configured load at a time

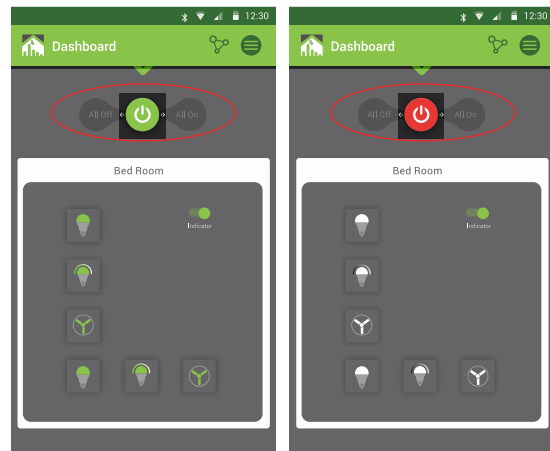


15

> Tap 'Indicator' button to turn On/Off the indicator of switch board

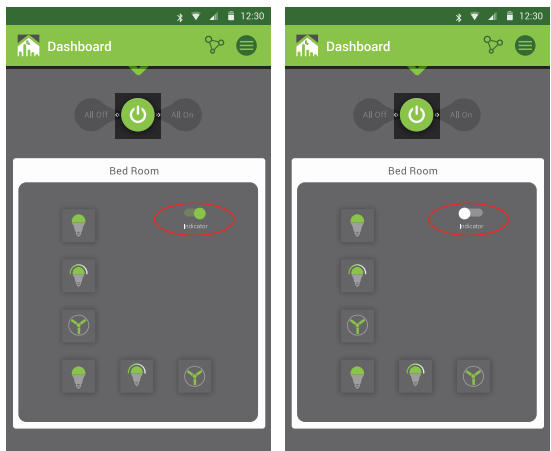

16


> Double tap configured/assigned load from dashboard and swipe dimming bar to manage light intensity

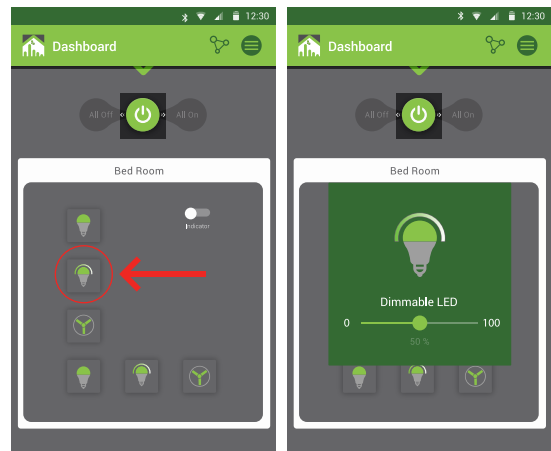

- To get dimming option from smart switch go to menu and select '....'. Now tap and hold any dimmable load from smart switch to control light intensity


17

> To delete any load, go to setting and select an assigned load, then tap delete icon and confirm

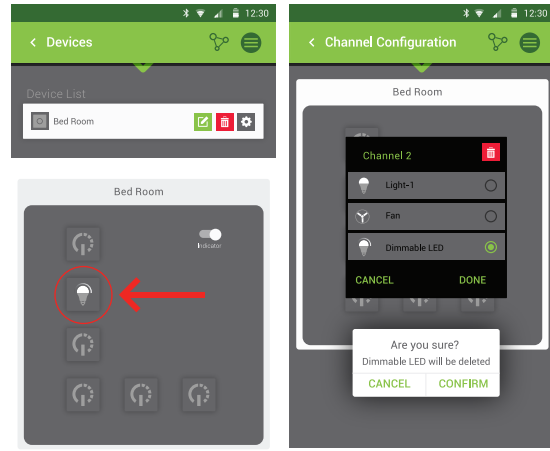

18


> To delete/deassociate device from app, tap and hold switch 1 & 6 at a time for 2 seconds from smart switch

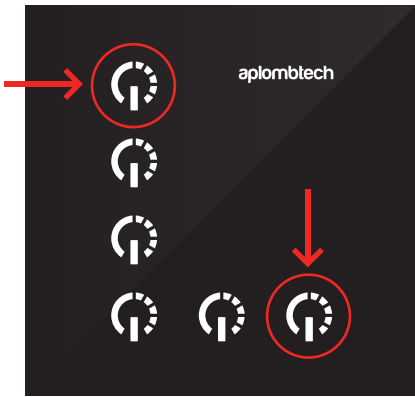

- Switch indicator would be blinked sequentially to confirm deletion/deassociation


19

> Go to 'Backup & Restore, select backup to save configuration and restore when needed

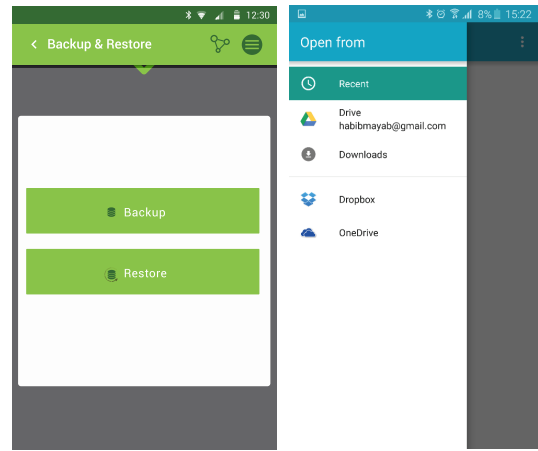

20


> Select 'Share Configuration' from Menu to provide access to others* on Smart Home app

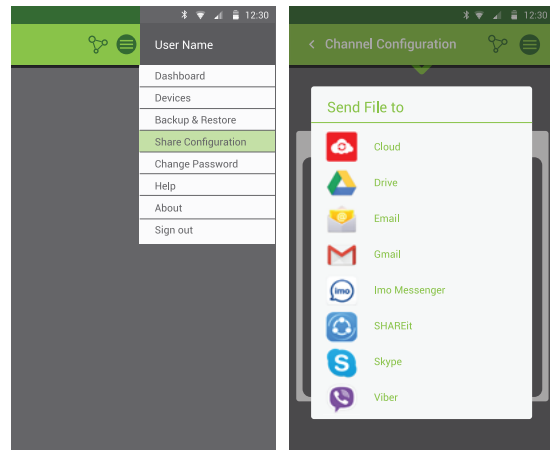

- Others need to restore shared configuration to control device

21

> Password change and sign out from Smart Home app

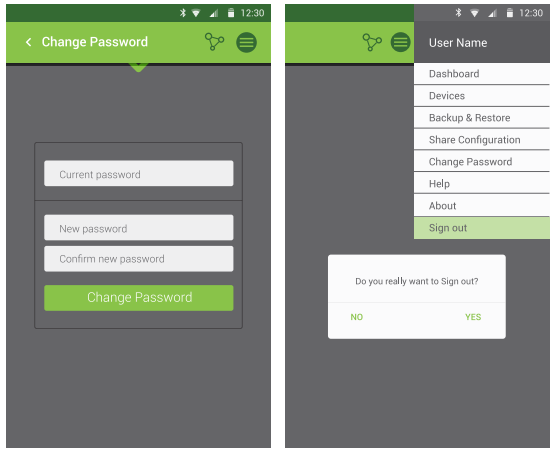

22